

OXXA[®]
ESSENTIAL



LIQUID
PROOF




DEXTERITY



GRIP

NEO- CHEM 41-090

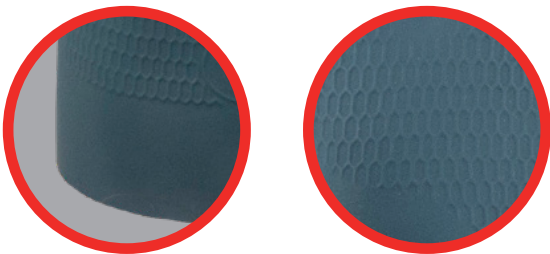

CHARACTERISTICS

- Glove with full neoprene coating
- Flocked cotton backing
- Cotton flock lining optimises wearing comfort
- Chlorinated finish
- Suitable for work in wet conditions
- Anti-slip profile for better grip
- Very flexible glove that protects the hand and forearm against various chemicals
- Ideal for use in cold environments: neoprene retains its excellent elasticity even at low temperatures (up to max. -10°C)
- Straight cuff
- Thickness: 0.70 mm
- Length: 300 mm

Article number: 1.41.090.00

SUITABLE FOR ACTIVITIES IN E.G.

- Petrochemistry
- Industry
- Transport & logistics
- Cleaning services
- Shipping
- Agriculture

COLOUR

Dark blue

SIZES

8/M to 11/XL incl.

PACKAGING

- 1 pair per polybag
- 12 pairs per bundle
- 144 pairs per outer box

EN 388:2016
+A1:2018



3110X

EN ISO 374-1:2016
+A1:2018/Type A



AKLMNPST

EN ISO 374-5:
2016




VIRUS

CE 0598
EN ISO 21420:2020

PRODUCT INFORMATION

SIZE	ARTICLE NO.	EAN-CODE 1 PAIR (POLYBAG)	EAN-CODE 12 PAIRS (BUNDLE)	EAN-CODE 144 PAIRS (OUTER BOX)
8/M	1.41.090.08	8718249007118	8718249007125	8718249007132
9/L	1.41.090.09	8718249007149	8718249007156	8718249007163
10/XL	1.41.090.10	8718249007170	8718249007187	8718249007194
11/XXL	1.41.090.11	8718249024092	8718249024108	8718249024115

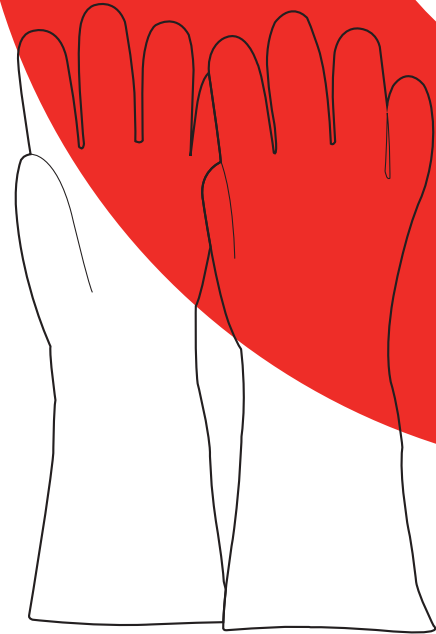

CLARIFICATION OF PICTOGRAMS

EN388:2016+A1:2018



3110X

EN388:2016+A1:2018



abcdef

Protection against mechanical hazards

A = Scuff resistance (0-4)
 B = Cut resistance (0-5)
 C = Tear resistance (0-4)
 D = Puncture resistance (0-4)
 E = Cut resistance (in accordance with EN ISO 13977 (A to F))
 F = Impact resistance (optional) (P = Passed)

Note: X = untested or not applicable

STORAGE CONDITIONS

The gloves should be kept in a clean, cool and dry place and not kept compressed in their original packaging. Do not expose the gloves to direct sunlight. Make sure that the packaging and the gloves are not damaged during shipping.

TESTING INSTITUTE

These gloves are certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Clonree, Dublin D15 YN2P, Ireland.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, we refer you to the following link: www.oxxa.work/doc

Protection against chemicals and microorganisms

EN ISO 374-1:2016/Type A		
	Chemicals	EN 15523:2015 permeation level
EN ISO 374-1:2016 /Type A AKLMNPST	Methanol (A)	2
	40% Sodium Hydroxide (K)	6
	96% Sulphuric Acid (L)	3
	65% Nitric acid (M)	2
	99% Acetic acid (N)	3
	30% Hydrogen peroxide (P)	6
	40% Hydrofluoric acid (S)	6
	37% Formaldehyde (T)	6

Resistant against bacteria, mould and viruses

EN ISO 374-5:2016		
EN ISO 374-5:2016	Resistance against bacteria and mould	Resistance against viruses
 VIRUS	PASS	PASS

EN ISO 374-2:2014	
Air leak test - Pass	Water leak test - Pass

EN ISO 374-1:2016 Permeation levels are based on the following breakthrough times:

Prestatie niveau	1	2	3	4	5	6
Minimale doorlooptijden (in min.)	>10	>30	>60	>120	>240	>480

EN ISO 374-4:2019	
Cas nummer	Klasse
(A) 67-56-1	Primary alcohol
(K) 1310-73-2	Inorganic base
(L) 7664-93-9	Inorganic mineral acid, oxidizing
(M) 7697-37-2	Inorganic mineral acid, oxidizing
(N) 64-19-7	Organic acid
(P) 7722-84-1	Peroxide
(S) 7664-39-3	Inorganic mineral acid
(T) 50-00-0	Aldehyde

Chemicalie	Gemiddelde degressie %
Methanol (A)	15.5
40% Sodium Hydroxide (K)	-6.8
96% Sulphuric Acid (L)	21.0
65% Nitric acid (M)	18.4
99% Acetic acid (N)	23.4
30% Hydrogen peroxide (P)	3.4
37% Formaldehyde (T)	8.1

YOUR SUPPLIER: