







RIIY PUWU FREE CHEMICAL RESISTANT

NITRI-FIT 44-526





CHARACTERISTICS

- · Unpowdered non-sterile disposable nitrile glove
- · Relief on the fingertips
- · Smooth interior
- · Extremely easy to slip on due to the rolled cuff
- · Ambidextrous design
- 100% latex-free to accommodate users with a latex allergy
- Thickness: cuff 0,05 mm / palm 0,07 mm / fingers 0,08 mm
- · Length: 240 mm
- · Weight: 3.5 grams (+/- 0.3 grams)
- AQL 2,5 (EN 374)
- · Suitable for contact with many types of food products
- · Packaged per 100 units in a dispenser

Article number: 1.44.526.00

SUITABLE FOR ACTIVITIES IN E.G.

- Food industry
- Agriculture
- Hospitality
- Maintenance
- LaboratoriesAutomotive

COLOUR

Blue

SIZES

7/S to 10/XL incl.

PACKAGING

- · 100 units per dispenser
- · 10 dispensers in outer box

EN ISO 374-1:2016 +A1:2018/Type B





EN ISO 374-5:




C€2777

EN 420:2003+A1:2009



PRODUCT INFORMATION

SIZE	ARTICLE NO.	EAN CODE 100 UNITS (DISPENSER)	EAN CODE 10 DISPENSERS (OUTER BOX)
7/S	1.44.526.07	8718249068232	8718249068270
8/M	1.44.526.08	8718249068201	8718249068249
9/L	1.44.526.09	8718249068218	8718249068256
10/XL	1.44.526.10	8718249068225	8718249068263

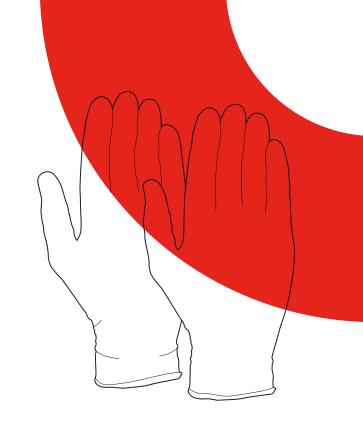

CLARIFICATION OF PICTOGRAMS

Protection against chemicals and microorganisms

EN ISO 374-1:2016/Type B					
EN ISO 374-1:2016 /Type A	Chemicals	EN 16523:2015 permeation level			
7(%	40% Sodium Hydroxide (K)	6			
	30% Hydrogen peroxide (P)	4			
KPT	37% Formaldehyde (T)	6			

EN ISO 374-4:2019			
Cas number	Class		
(K) 1310-73-2	Inorganic base		
(P) 7722-84-1	Peroxide		
(T) 50-00-0	Aldehyde		
Chemicals	Average degradation %		
40% Sodium Hydroxide (K)	-3.9%		
30% Hydrogen peroxide (P)	8.1%		
37% Formaldehyde (T)	2.9%		

Resistant against bacteria, mould and viruses

EN ISO 374-2:2014 Resistance against bacteria and mould PASS Resistance against viruses PASS	EN ISO 374-5:2016					
VIRUS PASS PASS	EN ISO 374-2:2014	against bacteria				
	VIRUS	PASS	PASS			

EN ISO 374-2:2014				
Air leak test – Pass	Water leak test – Pass			

EN ISO 374-1:2016 Permeation levels are based on the following breakthrough times:

_	_					
Performance level	1	2	3	4	5	6
Minimal breakthrough times (in min.)	>10	>30	>60	>120	>240	>480

STORAGE CONDITIONS

The gloves should be kept in a clean, cool and dry place and not kept compressed in their original packaging. Do not expose the gloves to direct sunlight. Make sure that the packaging and the gloves are not damaged during shipping.

TESTING INSTITUTE

These gloves are certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Clonee, Dublin D15 YN2P, Ireland.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, we refer you to the following link: www.oxxa-safety.com/doc

YOUR SUPPLIER:					
	'				