




Premium quality, super flexible and comfortable. Perfect dexterity, 15 gauge, sandy nitrile. Reinforced.

## KEY FEATURES

- Premium quality cut protection level C glove with high abrasion resistance.
- Much more lighter and comfortable than a 13 gauge similar cut level C/5 glove.
- Perfect dexterity, fitting and flexibility makes it also ideal for precision works.
- Sandy finish provides super grip in oily and dry working condition.
- Improved coating formulation provides extra softness and durability.
- Reinforcement greatly extends glove life to save your cost and provides extra protection in the weakest area.
- OEKO-TEX standard 100 certified for skin friendly.
- Individual pack available for retail shops.

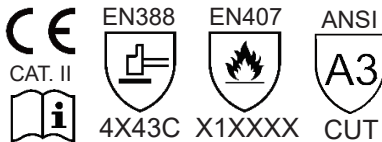

## PRODUCT DETAILS

Liner	UHMWPE mixed with other yarns
Gauge	15
Coating	Nitrile
Finishing	Sandy
Colour	Dark Blue / Black
Size	7,8,9,10,11
Packing	12 pairs/pack, 144 pairs/carton
Tariff number	61161020

## RECOMMENDED APPLICATIONS

**General purpose or precision works with high cut hazard or contact heat hazard in dry or light oily conditions.**

Such as precision works, assembly, handling parts with sharp or rough edges, maintenance, general handling, inspection, packaging, sorting, metal sheet works...



## CERTIFICATION


**CE** EN21420:2020

Category II

**EN388:2016 Mechanical protection:  
levels obtained in laboratory tests**

Abrasion (min.0 to max. 4): **4**  
Blade cut - coupe test (Index) (min.0 to max. 5): **X**  
Tear (min.0 to max. 4): **4**  
Puncture (min.0 to max. 4): **3**  
Cut resistance from sharp objects EN ISO  
13997:1999 (min. A to max. F, X - not tested): **C**  
Impact protection (P if pass, F if failed): **-**

EN388:2016



4X43C

**EN407:2020 Heat protection:  
levels obtained in laboratory tests**

A - Burning behaviour: X of 4  
B - Contact heat: 1 of 4  
C - Convective heat: X of 4  
D - Radiant heat: X of 4  
E - Small drops molten metal: X of 4  
F - Large quantity molten metal: X of 4

EN407:2020



X1XXXX

X = not tested or testing method is unsuitable for the design of the gloves.

## STORAGE AND SHELF LIFE

Please store the products in original packing in a dry and cool place without direct sunlight in general. The shelf life depends on the storage and other conditions. For the new product stored in a properly way, the shelf life of Xcellent 12-900 can normally be 5 years.

## CLEANING

Washing or dry-cleaning requires prior consultation with a recognized specialist, because such treatment may alter the protective properties of the glove. The gloves must always be checked for integrity before reuse. The rating with the marked performance levels based on tests on unused gloves.

## WARNING

Don't use in case of chemicals, moving machines or electrical risk.  
Please ensure the products are strictly used within their protection levels.

